





Horizontal Bar (with rings)



Helix Header Bar

assembly instructions

1. Insert horizontal bar through top banner hem and place on top upright tubes. Insert short upright with helix stud; twist and tighten.
2. Place horizontal bar on top of short uprights; twist and tighten.
3. Check to see that top helix bolts and uprights are tight. Raise stand to final height.
4. If stand is twisted or "racked," straighten the stand and tighten ALL connections. For your convenience, the stand can be lowered to eye-level, adjusted, then raised.

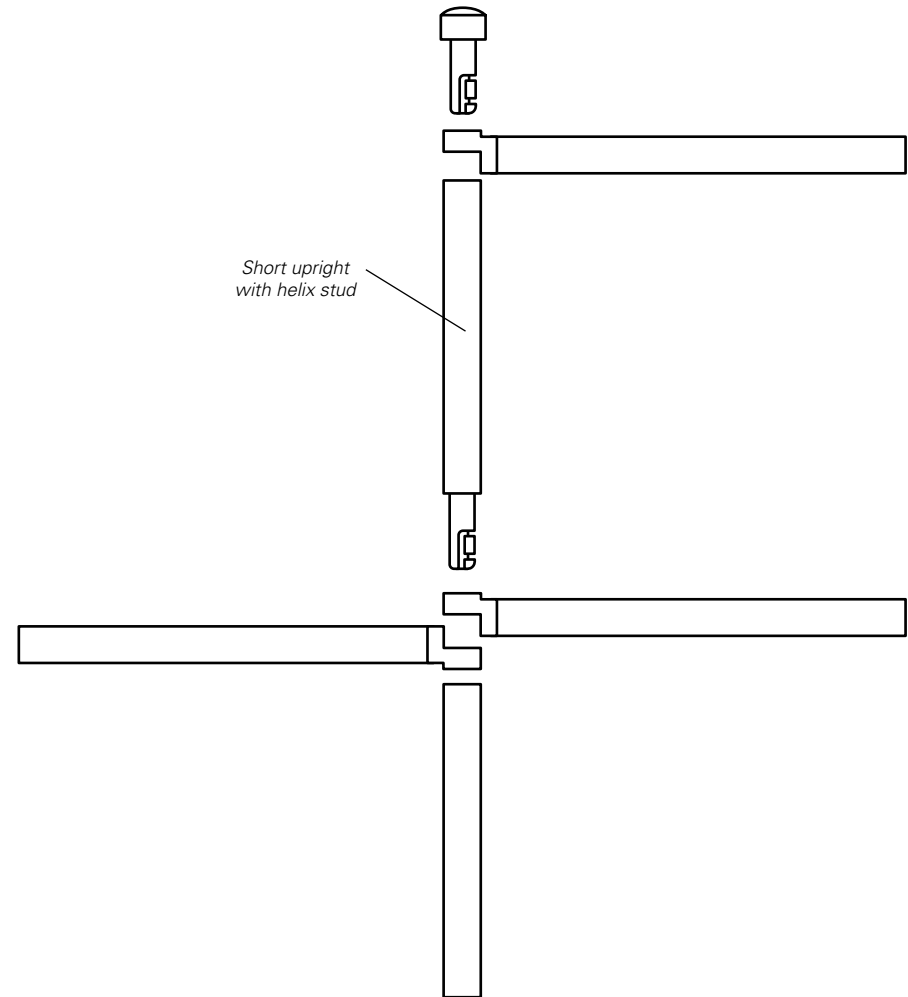

Blowup of section of DisplayONE unit; not to scale