


# DISPLAY ONE® Messenger•RTR

## PRESENTER 3180 INSTRUCTIONS

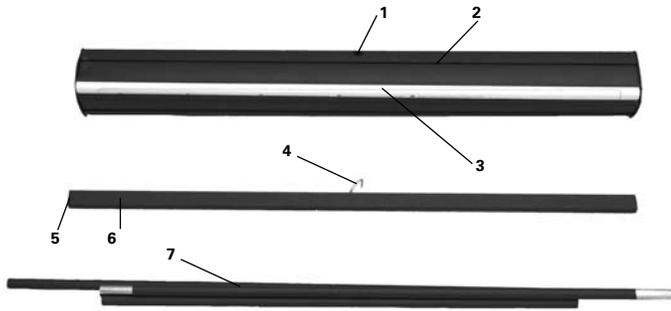



### Legend

- |                   |                      |
|-------------------|----------------------|
| 1. Pole Holder    | 5. Header End Cap    |
| 2. Base Unit      | 6. Header            |
| 3. Graphic Holder | 7. Shock-Corded Pole |
| 4. Header Hook    |                      |

**DO NOT PULL THE TENSION PIN UNTIL INSTRUCTED TO DO SO. Pulling the pin early will cause the graphic holder to retract.**

### Setting Up The Base

1. Take the base out of the bag, making sure all parts are present.
2. Flip over base unit. Rotate the feet so they are perpendicular to the base. Flip base back over.
3. Remove and assemble the shock-corded pole. Firmly insert pole into the pole holder on the unit.
4. Holding the header firmly, slowly pull the graphic up to the top of the shock-corded pole. Insert the header hook into the top of the pole.

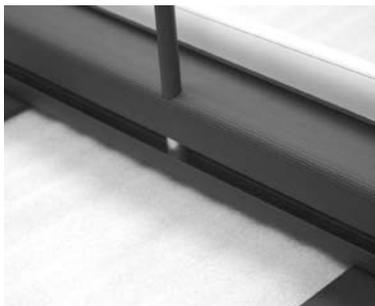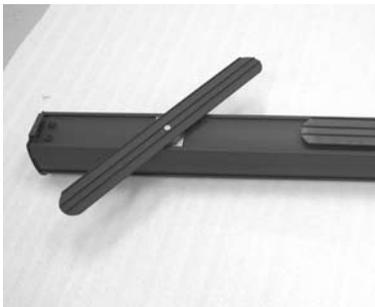

### Installing Graphics Part 1 - Header

1. Open the snap lock and place in front of graphic.
2. Line the graphic up into the header.
3. Press/close the header to lock the graphic firmly.



### Installing Graphics Part 2 - Bottom Base

1. Position the base in front of you, with the pole holder on the back half of the base.
2. Lay the banner out flat, right side up behind base.
3. On the graphic holder, there is a strip of adhesive. Remove the protective paper to expose adhesive.
4. Firmly and evenly press the bottom of the banner onto the adhesive strip on the graphic holder.



7. Insert pole into base; raise banner and insert header hook into the top of the pole.
8. Holding the graphic firmly, slowly remove tension pin.
9. Gently allow graphic slack to slowly retract into base.